



1.4


RVP...L2X


(NG)6 40
350 bar
600L/min



02
02
03
03
04

-
-
-



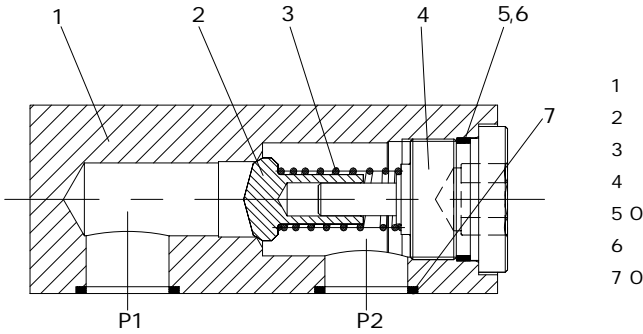

- 1
- 2
- 3
- 4
- 5 0
- 6
- 7 0

RVP

(2)


P1 P2

P2 P1

P1


(2)

(3)




6	= 6	L2X=	L20	L29
8	= 8	L20	L29)
10	=10	00=	(40)
12	=12		P1)
16	=16	02=		0.2bar
20	=20	05=		0.5bar
25	=25	15=		1.5bar
30	=30	30=		3bar
40	=40	50=		5bar

ø (HLP46 =40 ± 5)

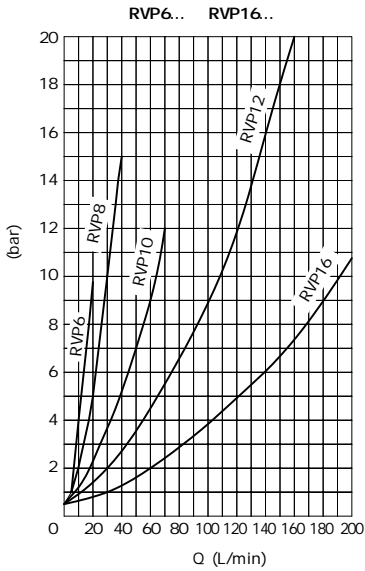

P1 P2
P Q
 (=38mm²/s, t=43° C)
 0.5 bar

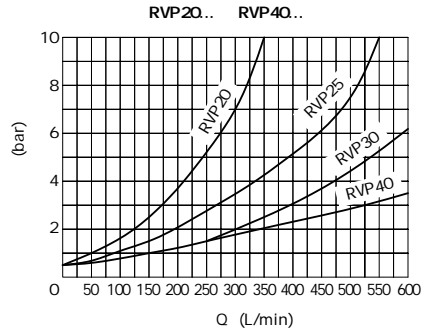


	6	8	10	12	16	20	25	30	40	
bar	350									
bar	0.2, 0.5, 1.5, 3, 5									
mm ² /s	2.8 500									
	-20 +80									
					NAS1638 9					ISO4406 20/18/15

O P

0.01/100mm

0.8

M N



T H

O P

6x A; B

J
K
L

M

D

U

2x S

H

J

C

F

E

	A;(B)	C	D	E	F	H	J	K	L
RVP6	M6;(12)	8	11	6.6	16	-	19	41.5	43
RVP8	M6;(12)	10	11	6.6	20	-	35	63.5	66.8
RVP10	M6;(12)	12.5	11	6.6	25	-	33.5	70	72
RVP12	M6;(12)	16	11	6.6	32	-	38	80	84
RVP16	M8;(12)	22.5	14	9	45	38	76	104	107
RVP20	M8;(16)	25	14	9	50	47.5	95	127	131
RVP25	M10;(20)	27.5	18	11	55	60	120	165	169
RVP30	M12;(24)	37.5	20	14	75	71.5	143	186	190
RVP40	M12;(24)	50	20	14	100	67	133.5	192	196

	M	N	O	P	S	R(O)	T	U	(kg)
RVP6	28.5	41.5	1.6	16	5	7x 1.5	6.4	7	0.2
RVP8	33.5	46	4.5	25.5	7	12x 2	14.3	7	0.4
RVP10	38	51	4	25.5	10	12x 2	17	8	0.5
RVP12	44.5	57.5	4	30	12	15x 2	21	7	1
RVP16	54	70	11.4	54	16	20.29x 2.62	14	9	2.1
RVP20	60	76.5	19	57	20	25x 3	16	10	3.3
RVP25	76	100	20.6	79.5	25	32x 3	15	11	5.8
RVP30	92	115	23.8	95	30	34.52x 3.53	15	13	10.3
RVP40	111	140	25.5	89	40	48x 3	16	18	17.9